

Quick Folding Gate

Keeping your entrances secured after every exit or entry

The Gunnebo Perimeter Protection Quick Folding Gate is a trackless bi-hinged gate and is the only way to keep your entrances secured after every exit or entry. It is fast, sturdy, very reliable and requires little maintenance due to the trackless design.

The opening widths are 3.5–6 metres and opening/closing takes 4–6 seconds. The standard heights are 2 or 2.5 metres. It has been designed with rationality in mind and offers an alternative to the combination of a sliding gate together with a boom barrier.

The gate is suited for the heaviest of trucks as there is no track or locking in the driveway, and since there is no top rail, even very high trucks can enter and exit. It locks when closed or in the event of a loss of power.

The Quick Folding Gate is supplied in standard sizes, but in different models and colours. It is motorised via a three-phase 400 V motor with a frequency converter. The blades of the gate folds open into the secured area and each blade can be opened separately if necessary. It is fitted with special edges and light beams for safety reasons and is TUV approved to the highest European gate norms.

The gate is designed for intensive and continuous use at locations such as logistic centres or ports.



Quick Folding Gate

Keeping your entrances secured after every exit or entry

Product Overview

- 3.5 – 6 metres opening width
- 4 – 6 seconds opening/closing speed
- Fast and secure
- One of the very few free-carrying designs
- No track or locking in the driveway – well suited for heavy trucks
- No top rail – well suited for the entry and exit of high trucks

Further Features

- Fast opening and closing
- Durable design
- High quality
- Easy service and maintenance
- Gate locks in closed state
- Stable design
- Supplied in standard sizes, but in different versions and colours
- Blades open into the secured area
- Blades can be opened separately as an option
- Safety edges and light beams to provide the required level of safety
- Designed for intensive and continuous use
- Tested and TUV approved/certified

Fast Cycle Time



Conventional tracked or cantilevered sliding gates normally operate at around 0.20 m/s, which make them unsuitable for high volume traffic control.

A six-metre sliding gate, for example, would have an opening/closing cycle of approximately 1 minute. Therefore, if the volume of traffic was more than 30 vehicles per hour, the gate would be almost permanently open! This then allows for “tailgating” or unauthorised entry if the gate is unmanned.

The cycle time of a Quick Folding Gate is only a few seconds. Therefore, even with high volumes of traffic, the gate will be closed and provides a higher level of security.

“Everything from one source”

“Everything from one source” is our principle. Planning, manufacturing, installation and maintenance is our competence. GPP stands at your side as a strong and experienced partner.

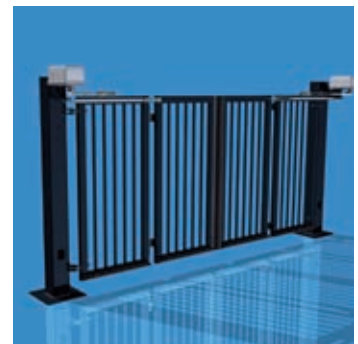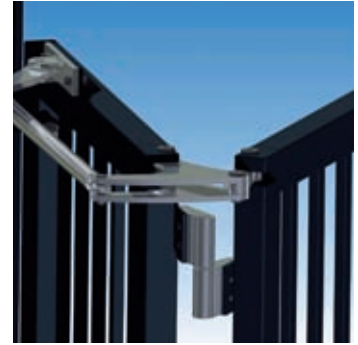

We reserve the right to alter product information without any obligation.